
Service Data

Vickers®

Piston Pumps & Motors

10 USgpm Fixed Displacement Inline Piston Units

MFB10-(F)U(Y)-20
MFB10-(F)U(Y)-30/31
PFB10-(F)*(Y)-20
PFB10-(F)*(Y)-30/31

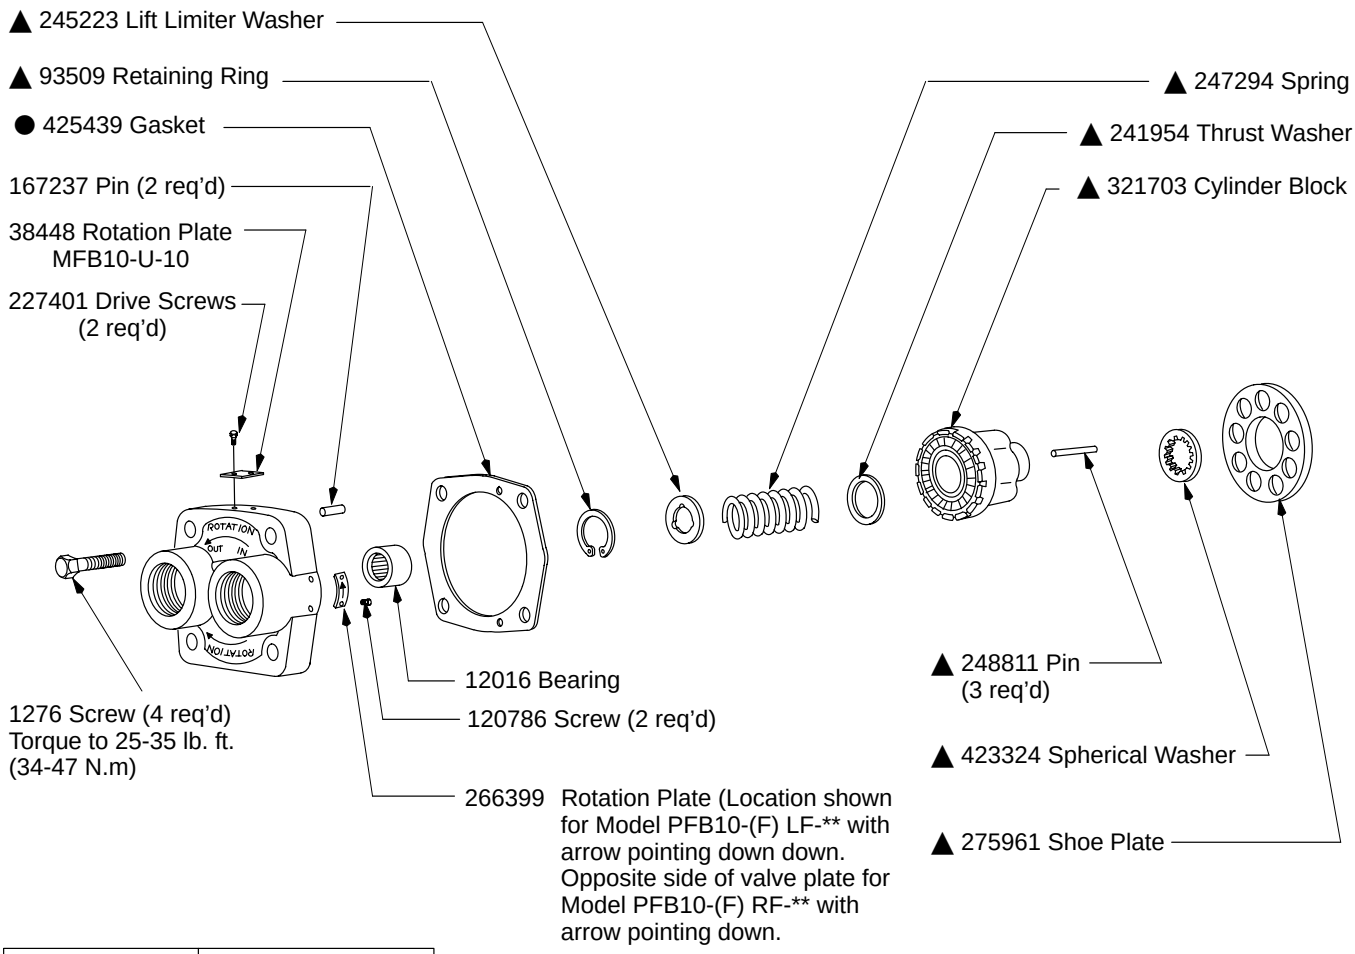

Model	Valve Plate S/A (Includes 12012 Bearing)
PFB10-R-20	938389
PFB10-R-30/31	942048
PFB10-L-20	938390
PFB10-L-30/31	942049
MFB10-U-20	938391
MFB10-U-30/31	942050


▲ Included in Rotating Group Kit 938272

F3 Equivalent 919312 Seal Kit

● Included in Seal Kit:

-20 Design - 919240
-3* Design - 919521


© Eaton Hydraulics, Incorporated 2000
All Rights Reserved

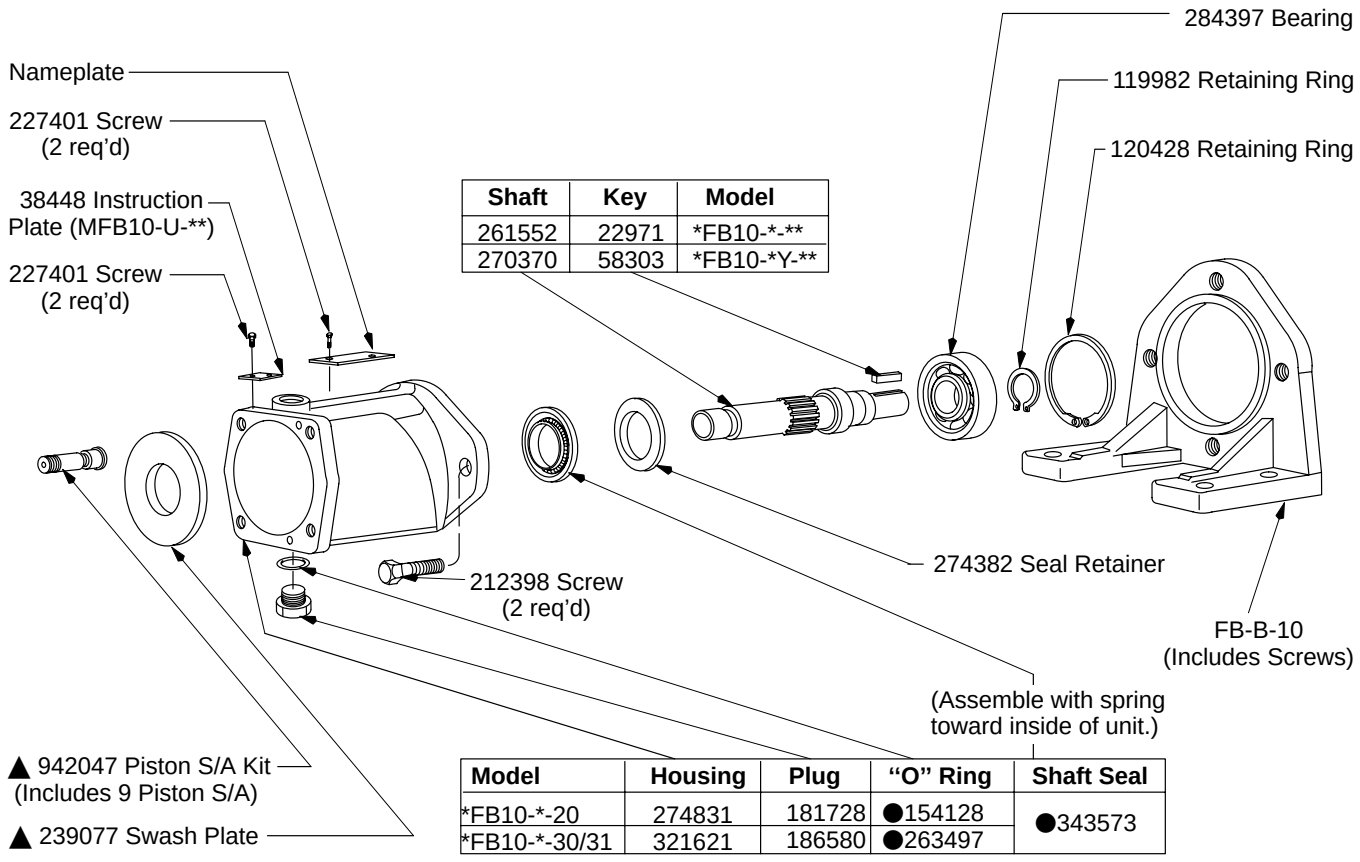


Shaft	Key	Model
261552	22971	*FB10-*-**
270370	58303	*FB10-*Y-**

Model	Housing	Plug	"O" Ring	Shaft Seal
FB10--20	274831	181728	●154128	●343573
FB10--30/31	321621	186580	●263497	

NOTE
See overhaul manual I-3230-S for maintenance information.

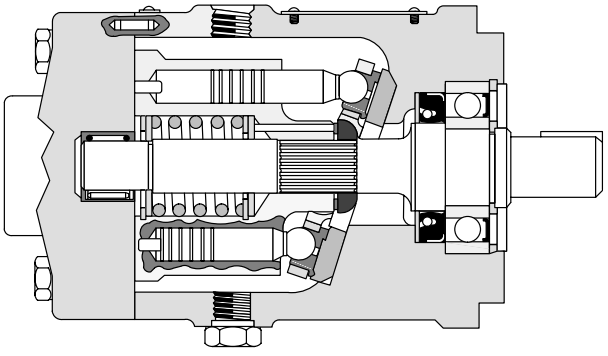

Model Code

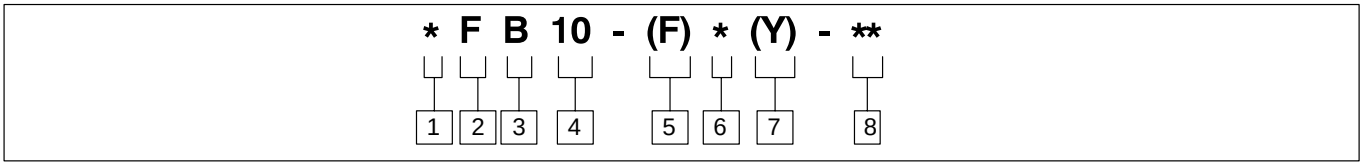

1 **Model**

M - Motor
P - Pump

2 **Fixed Displacement**

3 **Inline type**

4 **Flow rating @ 1800 rpm**

10 - 10 USgpm

5 **Mounting**

F - Foot bracket
Omitted - Flange

6 **Rotation**

R - Right Hand (Pumps only)
L - Left Hand (Pumps only)
U - Either direction

7 **Input shaft**

Y - Standard
Omitted - Short shaft

8 **Design**

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 16/13 or cleaner. Selections from pressure, return, and in-line filter series are recommended.

Printed in U.S.A.