Vickers®

Service Data

Piston Pumps


Fixed Inline Piston Units
5 USgpm

PFB5-(F)*Y-22
MFB5-(F)*Y-21

Released 02-01-93

I-3229-S


Model	■Valve Plate S/A
PFB5-(F)RY-22	942313
PFB5-(F)LY-22	942314
*FB5-(F)U(Y)-21	938551

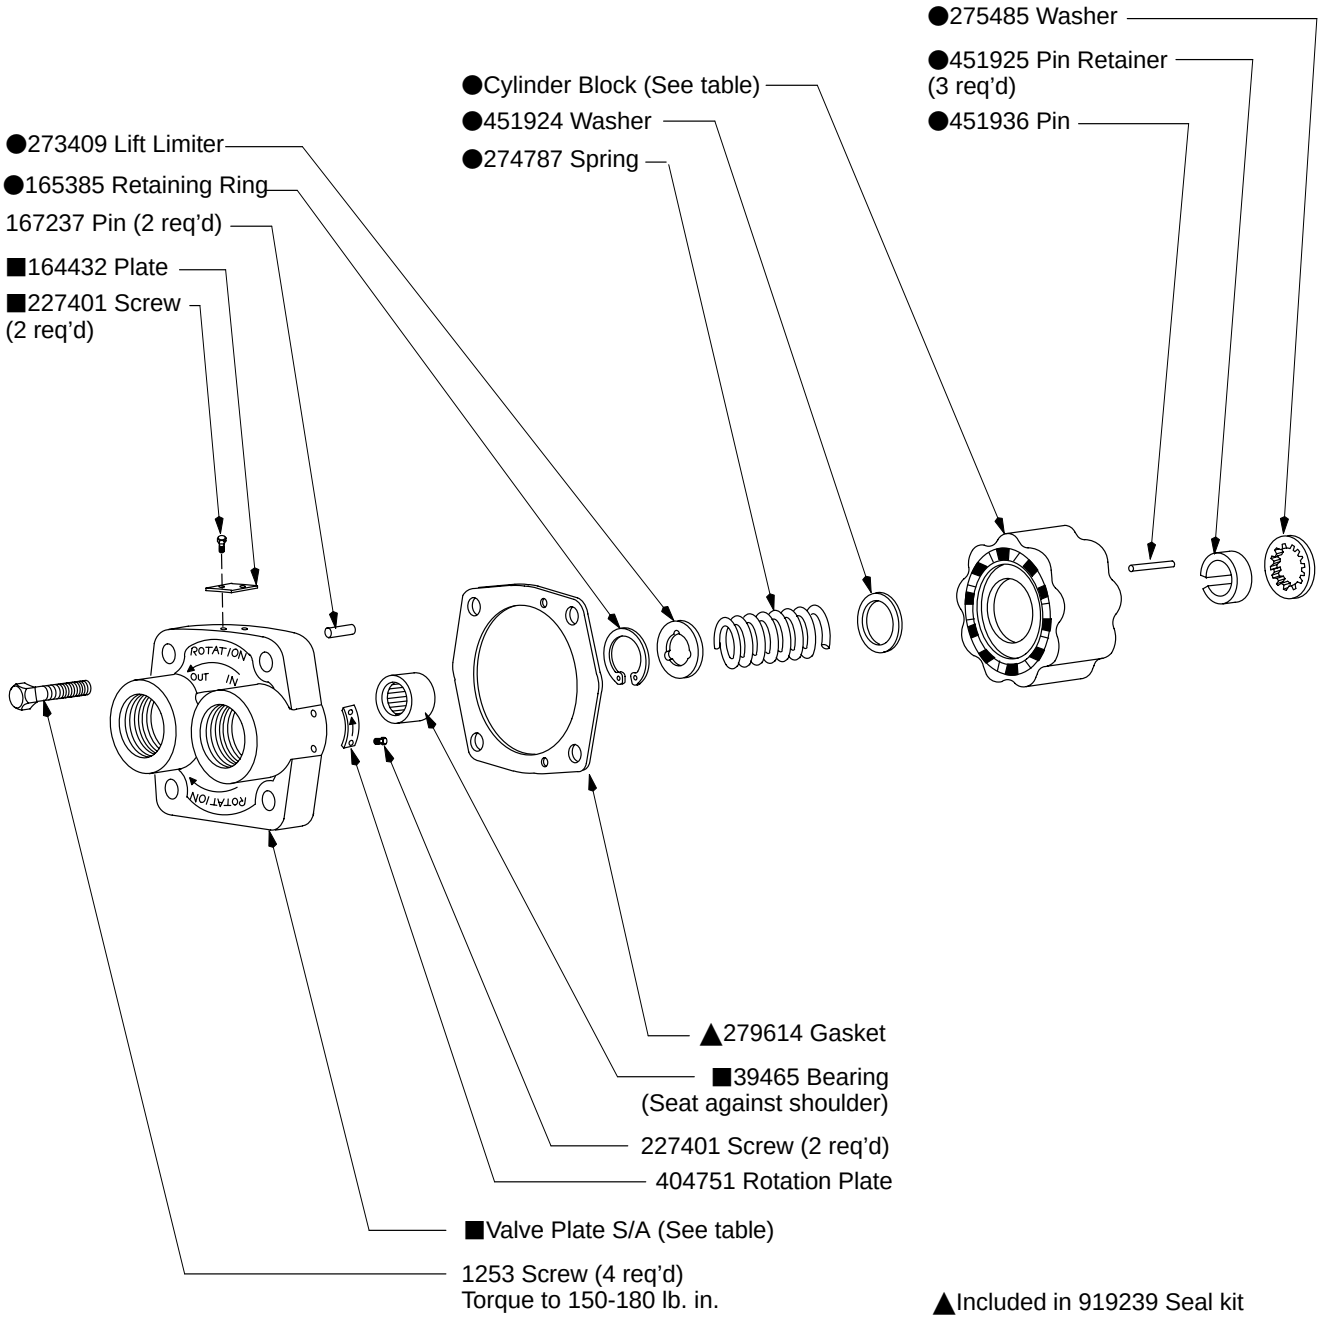


▲Included in 919239 Seal kit
F3 equivalent 919311
■Included in Valve Plate S/A
●Included in Rotating Group

© Eaton Hydraulics, Incorporated 2000
All Rights Reserved

FOOT BRACKET OPTION
FB-A-10 Mounting kit
(Includes screws)




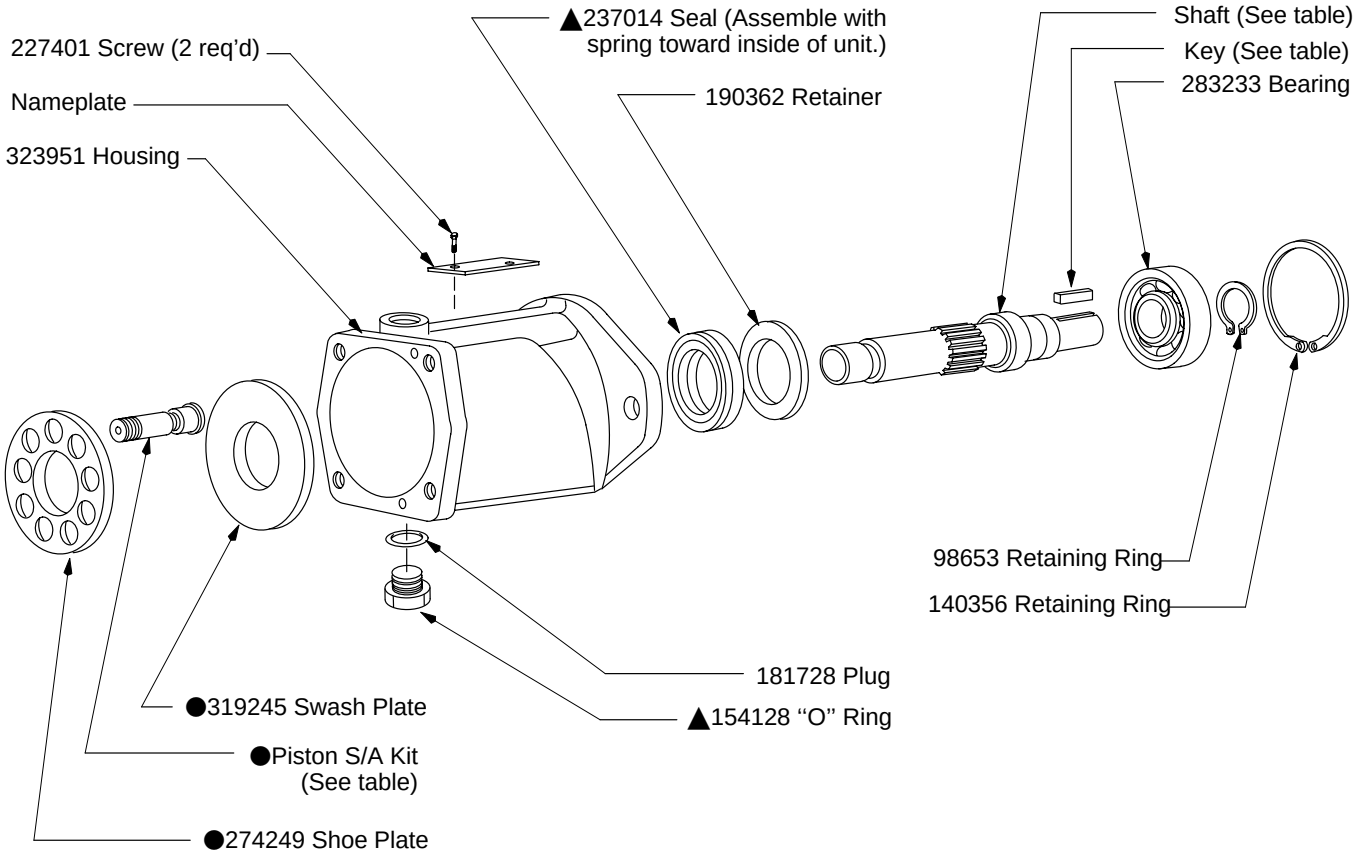

Shaft	Key	Model
274669	157671	Std.
266161	142843	Heavy duty

Cylinder Block	Piston S/A Kit	Rotating Group	Model
677061	942229	875775	PFB5
677059		875772	MFB5

Model Code

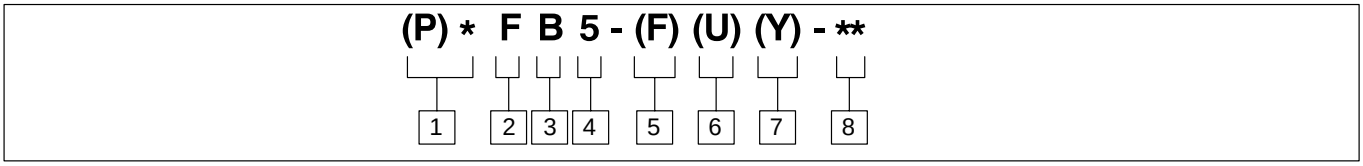

1 **Model**

P - Pump
M - Motor

2 **Fixed Displacement**

3 **Inline Type**

4 **USgpm flow rating @ 1800 rpm**

5 - 5 USgpm

5 **Mounting**

Omitted - Flange
F - Foot bracket

6 **Rotation**

(Viewed from shaft end)

U - Either direction
R - Right hand (CW)
L - Left hand (CCW)

7 **Input**

Omitted - Light duty
Y - Heavy duty

8 **Pump Design**

PFB - 22
MFB - 21

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 16/13 or cleaner. Selections from pressure, return, and in-line filter series are recommended.

Printed in U.S.A.